

UM1000 SERIES

3 Watt DC-DC Converters

- ◆ Utilizes Surface Mount Technology
- ◆ 2:1 Input Range
- ◆ 7.5 Watts/Cubic Inch
- ◆ Efficiency to 80%
- ◆ Remote On/Off Control
- ◆ 200 KHz Switching Frequency
- ◆ Continuous Short Circuit Protection

SPECIFICATIONS:

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range, 24V.....18-36V
 48V.....36-72V
 Input Filter.....Pi Network
 Remote On/Off Control....."TC" Pin-Out Only

OUTPUT SPECIFICATIONS

Voltage Accuracy, Single Output.....±1% max.
 Dual + Output.....±1% max.
 -Output.....±1% max.
 Voltage Balance, Dual Output at Full Load
 ±1.0% max.
 Transient Response,
 Single, 25% Step Load Change.....<500µsec.
 Dual,FL-1/2L,±1% Error Band.....<500µsec.
 Ripple and Noise, 20MHz BW,
 Single.....100mV P-P max.
 Duals.....100mV P-P max.
 Temperature Coefficient.....±0.02%/°C max.
 Line Regulation¹.....±0.2% max.
 Load Regulation², Single Output.....±0.2% max.
 Dual Output.....±0.5% max.
 Short Circuit Protection.....Continuous.

GENERAL SPECIFICATIONS

Efficiency.....See Table
 Isolation Voltage³.....500 VDC, 1000 VDC min.
 Isolation Resistance.....10⁸ Ohms min.
 Isolation Capacitance.....300pF typ.
 Switching Frequency.....200KHz typ.
 Operating Temperature Range,
 Ambient, None Derating.....-25°C to +71°C
 Cooling.....Free Air Convection
 Storage Temperature Range.....-40°C to +125°C
 Dimensions Case A.....1.25 x 0.80 x 0.40 inches
 (31.8 x 20.3 x 10.2 mm)
 Case Material.....Non-Conductive Black Plastic
 UL94V-0
 Weight.....15g

NOTES:

1. Measured from high line to low line.
2. Measured from full load to no load, dual outputs loaded equally.
3. 1000 VDC for "T"/"TC" pin-out only.


REMOTE ON/OFF CONTROL	
Control Input	Pin 20
Control Common	Pin 23,24
Logic Compatibility	
.....	COMS or Open Collector TTL
Control Voltage	
On	>+5.5 VDC Or Open Circuit
Off	<+1.8 VDC or Jumper to Pin 23,24
Converter Shutdown Idle Current	10mA

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF	REGULATION		CASE	ALT ¹ PIN OUT
				NO LOAD	FULL LOAD		LINE	LOAD		
UM1001	24 VDC	5 VDC	500 mA	15 mA	136 mA	77	0.2%	0.2%	A	T/TC
UM1002		12 VDC	250 mA	15 mA	157 mA	80	0.2%	0.2%		T/TC
UM1003		15 VDC	200 mA	15 mA	157 mA	80	0.2%	0.2%		T/TC
UM1004		± 5 VDC	± 250 mA	15 mA	136 mA	77	± 0.2%	± 0.5%		T/TC
UM1005		± 12 VDC	± 125 mA	20 mA	157 mA	80	± 0.2%	± 0.5%		T/TC
UM1006		± 15 VDC	± 100 mA	20 mA	157 mA	80	± 0.2%	± 0.5%		T/TC
UM1009		3.3 VDC	500 mA	15 mA	95 mA	73	0.2%	0.2%		T/TC
UM1011	48 VDC	5 VDC	500 mA	10 mA	68 mA	77	0.2%	0.2%	A	T/TC
UM1012		12 VDC	250 mA	10 mA	78 mA	80	0.2%	0.2%		T/TC
UM1013		15 VDC	200 mA	10 mA	78 mA	80	0.2%	0.2%		T/TC
UM1014		± 5 VDC	± 250 mA	10 mA	68 mA	77	± 0.2%	± 0.5%		T/TC
UM1015		± 12 VDC	± 125 mA	10 mA	78 mA	80	± 0.2%	± 0.5%		T/TC
UM1016		± 15 VDC	± 100 mA	10 mA	78 mA	80	± 0.2%	± 0.5%		T/TC
UM1019		3.3 VDC	500 mA	10 mA	47 mA	73	0.2%	0.2%		T/TC

NOTES: 1. Alternate pin-out version, to order suffix a "T" or "TC" to model number.
2. Maximum capacitive load across the output ports should not be over following indicated values.

MODEL NUMBER	1001	1002	1003	1004	1005	1006	1009	1011	1012	1013	1014	1015	1016	1019
MAXIMUM ² CAPACITIV E LOAD	470uF	220uF	150uF	± 220 uF	± 100 uF	± 68uF	470uF	470uF	220uF	150uF	± 220 uF	± 100 uF	± 68uF	470uF

CASE A

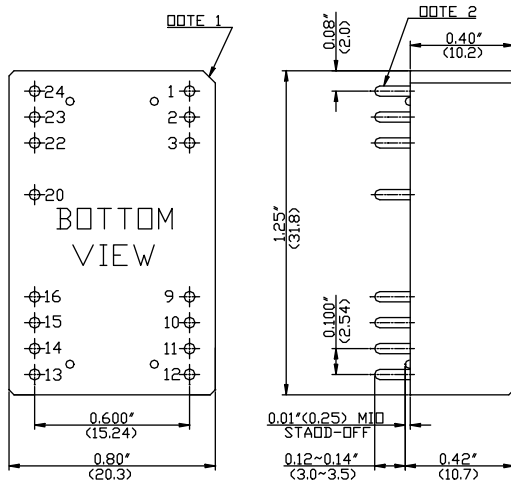

PIN CONNECTIONS			ALTERNATED PIN CONNECTIONS Suffix "T"/"TC"	
Pin	Single Output	Dual Output	Single Output	Dual Output
1	NP*	NP*	+V Input	+V Input
2	-V Input	-V Input	+V Input	+V Input
3	-V Input	-V Input	NP*	NP*
9	NC*	Common	NP*	NP*
10	NC*	NC*	NC*	Common
11	NC*	-V Output	NC*	Common
12	NP*	NP*	-V Output	NC*
13	NP*	NP*	+V Output	-V Output
14	+V Output	+V Output	NP*	NP*
15	NC*	NC*	NC*	+V Output
16	-V Output	Common	NP*	NP*
20	NP*	NP*	NP/Control*	NP/Control*
22	+V Input	+V Input	NP*	NP*
23	+V Input	+V Input	-V Input	-V Input
24	NP*	NP*	-V Input	-V Input

All dimensions in inches(mm).
Note 1: Cut-corner marking for Pin No.1
Note 2: Pin size is 0.020± 0.005 inch(0.5mm) dia.
Or 0.020*0.012 inch.
Note 3: Tolerance .xx =± 0.02
.xxx =± 0.010

*NC: No Connection.
*NP: No Pin
*NP/Control: Suffix "T" for No Pin.
Suffix "TC" for Control Pin.